

FLOWTITE PRODUCTS

GREASE INTERCEPTOR

NOTE: CUSTOMER SUPPLIED
"ASTM C-1644" APPROVED
FLEXIBLE PIPING COUPLING
REQUIRED ON TANGENTIALLY
MTD. NOZZLES, & PIPES

SHELL CODES: 2-EXS10SD





THIS IS AN IAPMO APPROVED TANK
COMPLIANCE STANDARDS AND CODES:
IAPMO/ANSI Z1001
UNIFORM PLUMBING CODE (UPC)
INTERNATIONAL PLUMBING CODE (IPC)
MFG. PER PE-C22.85

CAPACITIES:

LIQUID OPERATING CAPACITY = 14599 GALS
FREE SURFACE AREA OF LIQUID = 324 SQ/FT
GREASE/FOG STORAGE = 8010 GALS/60876 LBS

24" (23.5"O.D.) ACCESS COLLAR
w/ADHESIVE CHANNEL &
22 1/2" TANK TOP CUT-OUT
(3 TYP.)

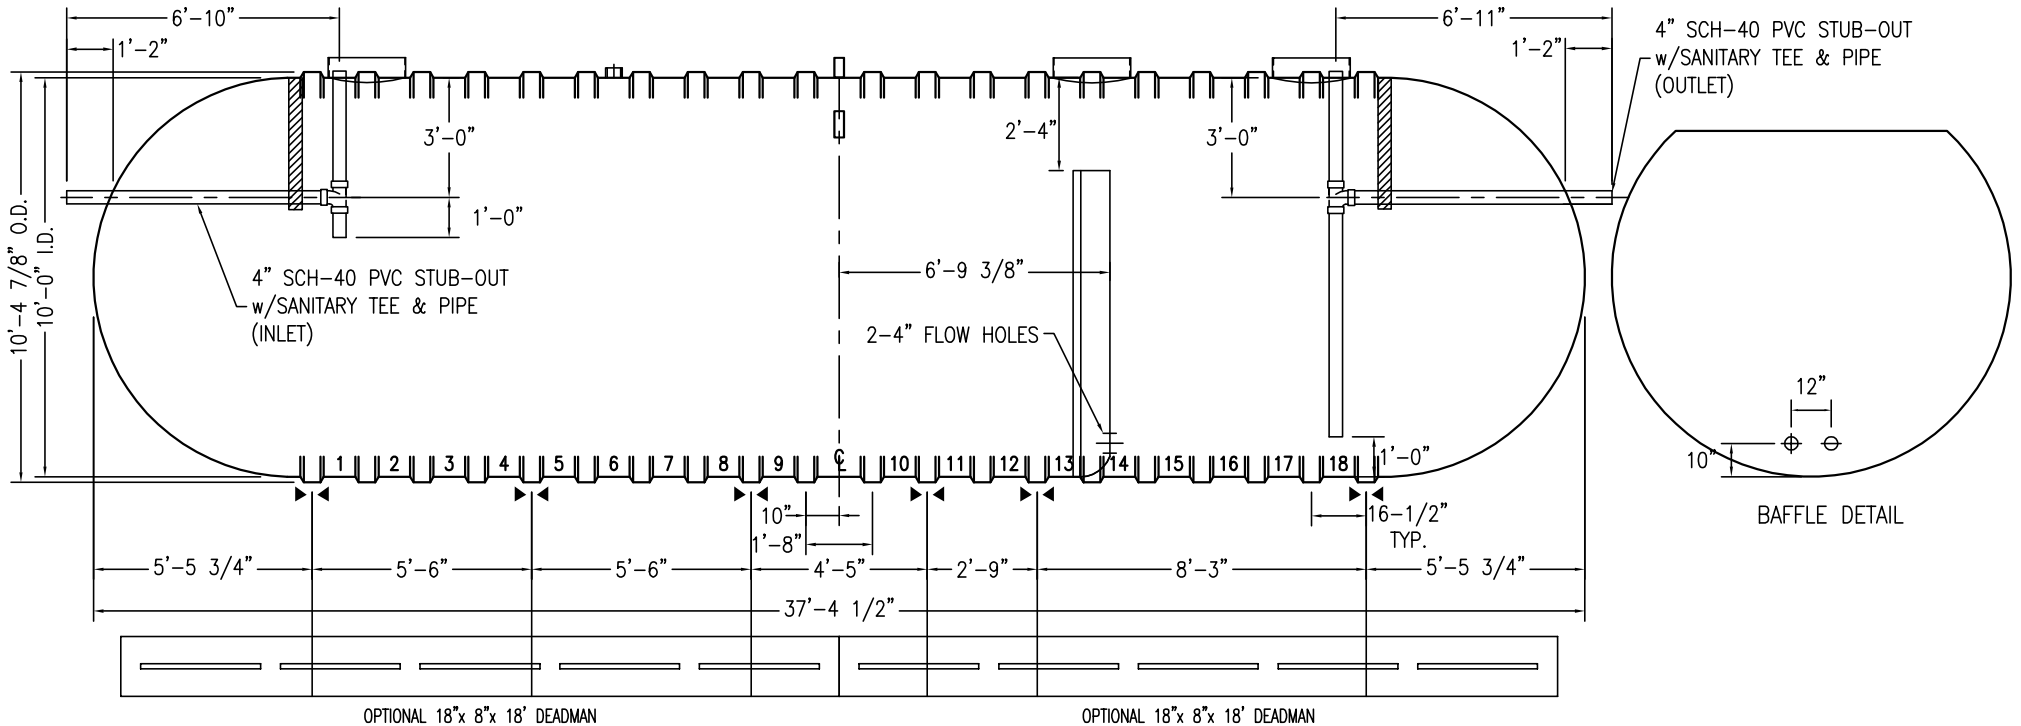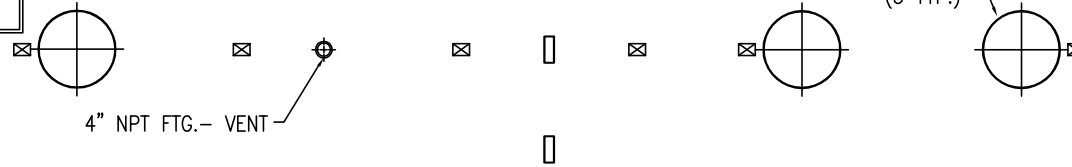

NOTES:

- ☒ HOLD DOWN STRAP CLIP
- ▶◀ HOLD DOWN STRAP LOCATION
- TYPE "13" LIFT LUG - SD
- TYPE "13" LIFT LUG - HD

SWT D6 (10')-14600 2B-IG		DATE: 1/1/2014
IAPMO GREASE INTERCEPTOR		DRAWN BY: R.MOEN
CONTAINMENT SOLUTIONS S.	CAPACITY: 19,951	REVISED: 02/01/17-A
	WEIGHT: DRY/WET 6350	DWG NUMBER: 1015MSW-IG