

SHELL CODES: 2-E8S06SD

FLOWTITE PRODUCTS

GREASE INTERCEPTOR



NOTE: CUSTOMER SUPPLIED "ASTM C-1644" APPROVED FLEXIBLE PIPING COUPLING REQUIRED ON TANGENTIALLY MTD. NOZZLES, & PIPES



THIS IS AN IAPMO APPROVED TANK THE ONLY CHANGE ALLOWED TO THIS TANK IS TO INCREASE THE INLET AND OUTLET PIPE DIAMETER. MFG. PER. PE-C22.85

CAPACITIES:

LIQUID OPERATING CAPACITY = 5734 GALS
 FREE SURFACE AREA OF LIQUID = 130 SQ/FT
 GREASE/FOG STORAGE = 2695 GALS/20482 LBS

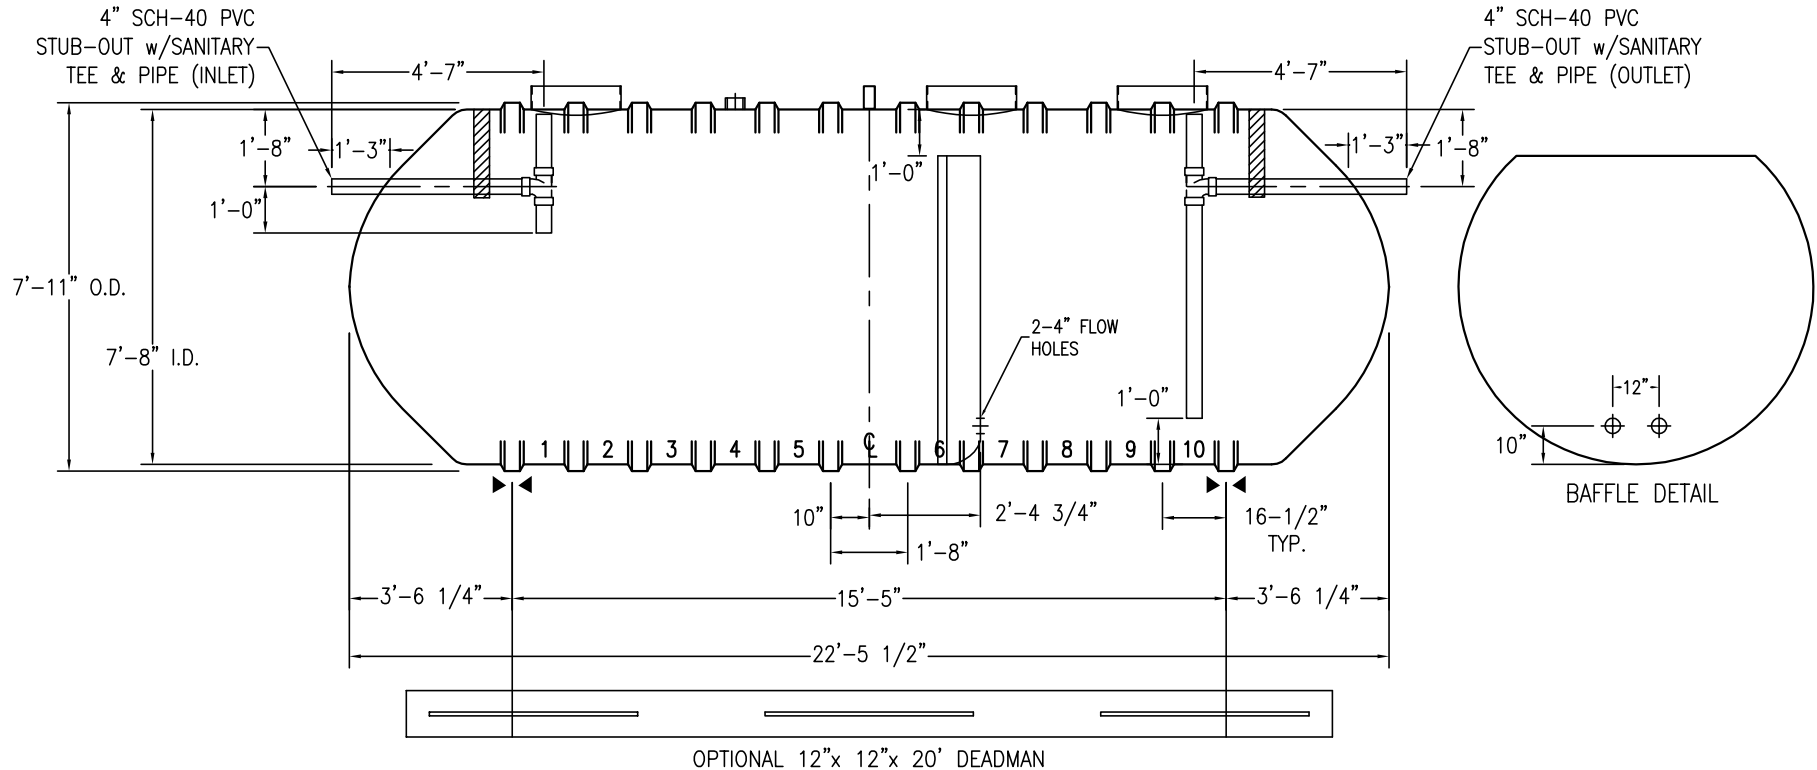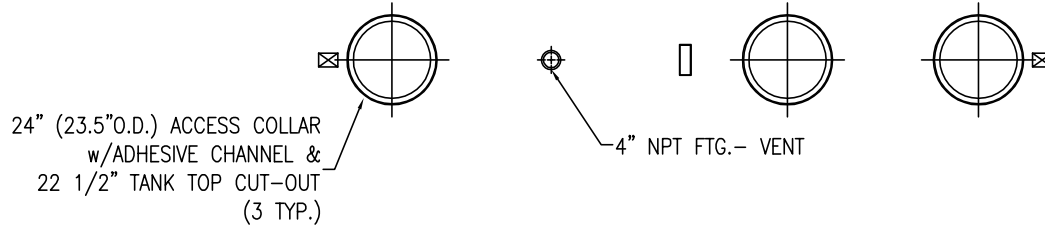

NOTES:

- ☒ HOLD DOWN STRAP CLIP
- ▶◀ HOLD DOWN STRAP LOCATION
- TYPE "13" LIFT LUG - SD
- TYPE "13" LIFT LUG - HD

SWT G-6 (8')-5700 2B-IG		DATE:	2/1/2014
IAPMO GREASE INTERCEPTOR		DRAWN BY:	R.MOEN
CONTAINMENT SOLUTIONS	CAPACITY:	6,947	
	WEIGHT: DRY/WET	2450	
		REVISED:	
		DWG NUMBER:	857CSW-IG